



Bellagio **COLLECTION**

Tekstilne Ploče

Bellagio

COLLECTION

Itison ploče iz naše kolekcije Bellagio su savršen izbor za one koji traže održivu i podnu oblogu sa stilom. Ova tekstilna ploča je napravljena od visokokvalitetnog poliamidnog SDN vlakna i ima šišanu strukturu, koja pruža luksuzan izgleda i visoku udobnost pri hodanju.

Jedna od najvećih prednosti ove itison ploče je njena izdržljivost. Pomenuto poliamidno SDN vlakno ,zbog svog kvaliteta, može trajati godinama bez habanja ili promene boje. Pored toga tekstilna ploča se lako održava i čisti, što je čini savršenom za prometne prostorije kako u domovima tako i u komercijalnim objektima.

Dodatna prednost kolekcije Bellagio je mekan osećaj koji pruža pod nogama. Zahvaljujući šišanoj strukturi, podna obloga je mekana i udobna, što je čini savršenom za hotelske sobe, spavaće sobe i dnevne sobe u kojima želite da se opustite.

Tekstilna ploča Bellagio se izrađuje u mirnim bojama koje se uklapaju u svaki enterijer. Može se postaviti u jednoj boji gde čini monolitnu celinu ili u kombinaciji sa drugim bojama za razigran efekat.

Poseduje sertifikat za sporogorivost klase Bfl-S1 što je čini pogodnom za sve prostorije u komercijalnim uslovima.









Bellagio


kolekcija tekstilnih ploča



D 5720



D 5730

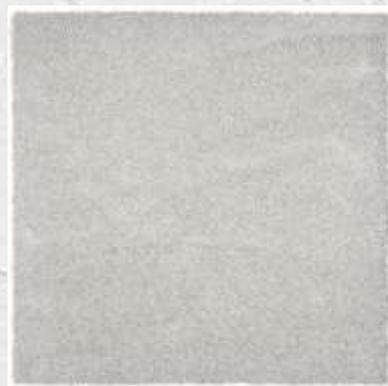

D 5741



D 5743



D 5745



D 5750

SPECIFICATION

Quality		: Bellagio
Construction		: Tufted cut pile
Gauge		: Tufted 1/8"
No. of tufts	ISO 1763	: $\pm 144000/m^2$
Pile fibre		: 100% PA 6 SDN
Pile weight	ISO 8543	: $1250 \text{ gr}/m^2 \pm 5\%$
Pile height	ISO 1766	: $9,50 \text{ mm} \pm 5\%$
Primary Backing		: polyester fleece
Tile backing		: Polyflex with glass fibre scrim
Total thickness	ISO 1765	: $10 \text{ mm} \pm 5\%$
Total weight	ISO 8543	: $4400 \text{ gr}/m^2 \pm 7,5\%$
Tile size		: $50 \times 50 \text{ cm} (\pm 19.7'' \times 19.7'')$
Tiles per box		: 12



PERFORMANCE

Use classification	method en 1307	: 32
Castor chair test	EN 985	: Intesive
Thermal isolation	ISO 8302	: $0.122 \text{ m}^2 \text{ K}/\text{W}$
Dimensional stability	EN 986	: $\leq 0,2\%$
Luxury/Comfort	EN 1307 : LC5	
Sound Absorption	ISO 354	: $\alpha_w 0,20$
Impact sound reduction	ISO 10140	: 25 dB
	ISO 10140	: 42 dB (1000Hz)

ELECTROSTATIC PROPERTIES

Permanent antistatic	ISO 105 B02	: $\leq 2.0 \text{ kV}$
Transversal resistance	ISO 10965	: $\geq 10^{10} \Omega$
Static loading		: anti-static



FLAME PROPERTIES

Reaction to fire	EN ISO 11925-2 EN ISO 9239-1	: B _{fl} -s1
------------------	---------------------------------	-----------------------



COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	: ≥ 7.00
Rubbing, dry	ISO 105 X12	: ≥ 5.00
Rubbing, wet	ISO 105 X12	: ≥ 5.00

GENERAL

Recommended maintenance:	Best results are obtained when cleaned with a dry shampoo method.
Pile direction:	Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard.
Laying instructions:	Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m^2 it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

Colours:

5720	5730	5741
5743	5745	5750





Požeška 67A, 11030 Beograd
+381 11 23 49 183
office@informa.rs
www.informa.rs