




# **Cloud** **COLLECTION**

---

***Tekstilne Ploče***

# Cloud *COLLECTION*

Pretvorite svoj prostor u oazu spokojne elegancije uz našu zadivljujuću kolekciju tekstilnih ploča Cloud. Ova raznovrsna serija prikazuje zadivljujuću međusobnu igru visokokontrastnih boja, bez napora uparujući je i sa klasičnom crnom i crnom gradijentnom tekstilnom pločom. Kao što ime govori, dizajn je inspirisan umirujućim prostranstvom neba prekrivenog oblacima, donoseći dašak prirodnog spokoja u vaše okruženje. Izrađene sa najvećom preciznošću i kvalitetom, svaka tekstilna ploča u kolekciji Cloud je napravljena od 100% poliamida, što obezbeđuje izdržljivost i dugotrajnu lepotu. Poliamidni materijal ne samo da pruža luksuzno i udobno iskustvo pod nogama, već takođe pokazuje izuzetnu postojanost boja, osiguravajući da će Vaš pod izgledati živopisno godinama koje dolaze. Bez obzira da li želite da poboljšate ambijent svoje kancelarije ili da poboljšate ambijent svog doma, tekstilne ploče Cloud su dizajnirane da zadovolje Vaše potrebe. Njihova svestranost se proteže i na prometne komercijalne prostore i na udobne uglove Vašeg doma, čineći ih praktičnim i estetski prijatnim izborom za svako okruženje.

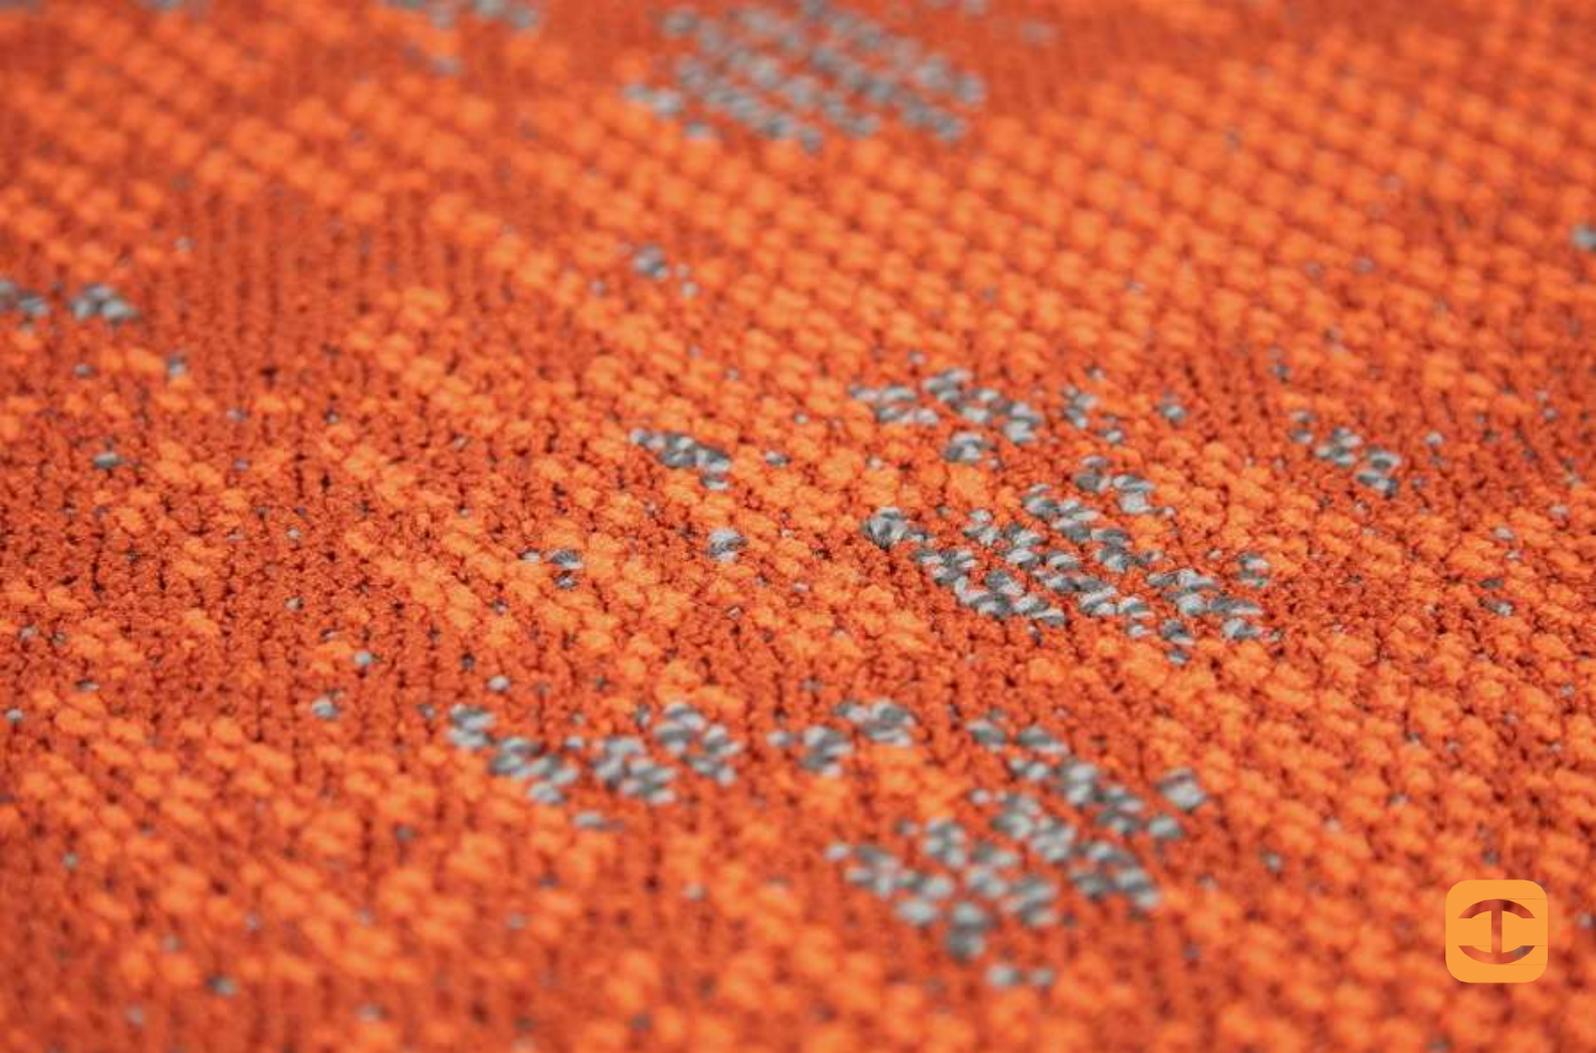















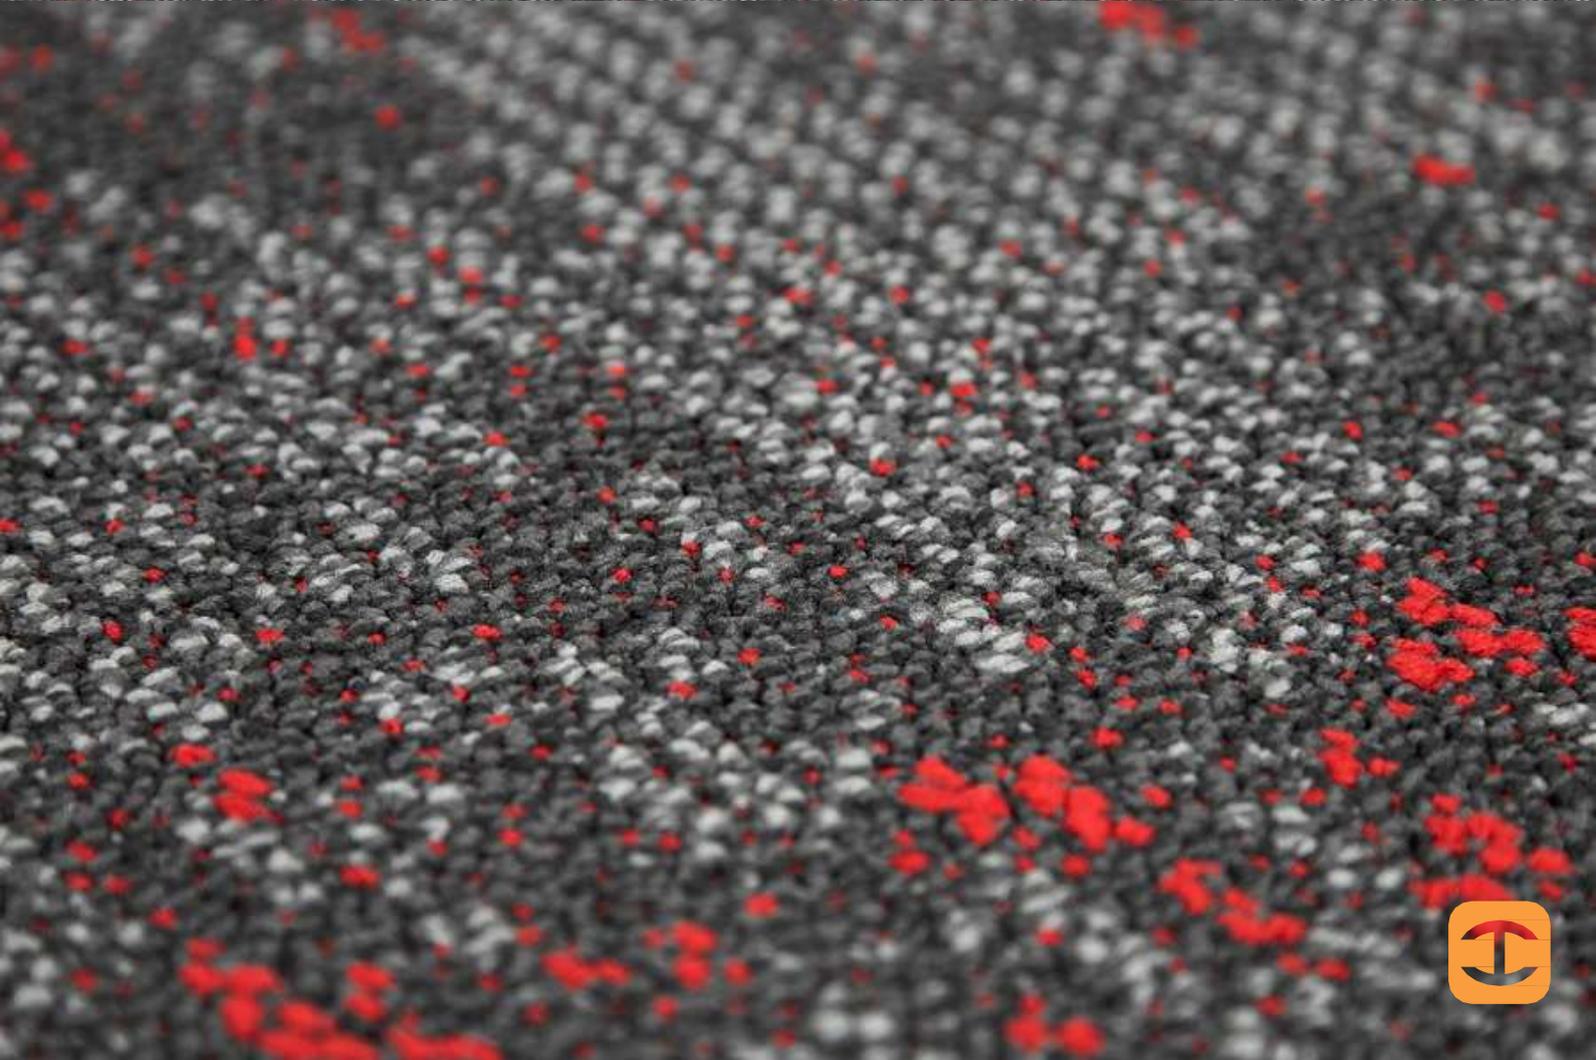



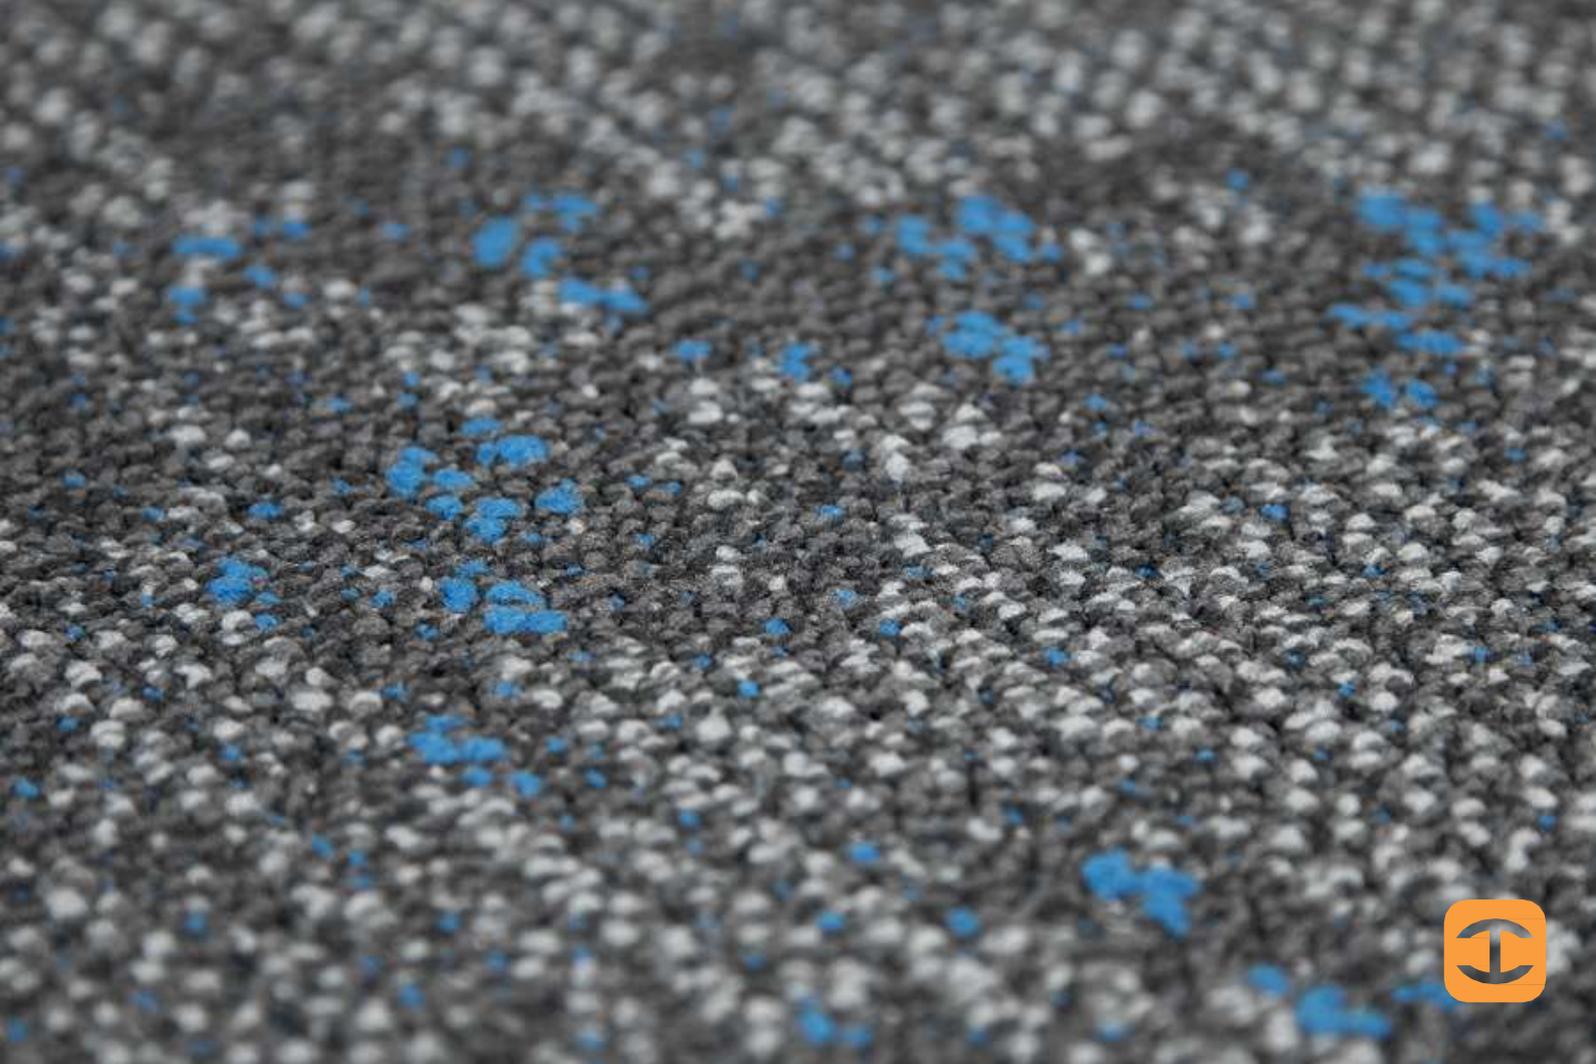





# Cloud



## kolekcija tekstilnih ploča



D 9662



D 9671



D 9675



D 9625



D 9672



D 9675



D 9633



D 9673



D 9675



D 9655



D 9677



D 9675

# Cloud

## kolekcija tekstilnih ploča



D 9665



D 9676



D 9675



D 9685




D 9678



D 9675

## SPECIFICATION

Quality		: <b>CLOUD</b>
Construction		: Scroll loop pile
Dye method		: Solution dyed
Gauge		: Tufted 1/10"
No. of tufts	ISO 1763	: ± 236400/m <sup>2</sup>
Pile fibre		: 100% Nylon (PA 6)
Pile weight	ISO 8543	: 650 gr/m <sup>2</sup> ± 5%
Pile height	ISO 1766	: 3.5 mm ± 5%
Primary backing		: Non-Woven
Tile backing		: Polyflex
Total thickness	ISO 1765	: 5,7 mm ± 5%
Total weight	ISO 8543	: 4100 gr/m <sup>2</sup> ± 7,5%
Tile size		: 50 x 50 cm (± 19.7" x 19.7")
Tiles per box		: 20

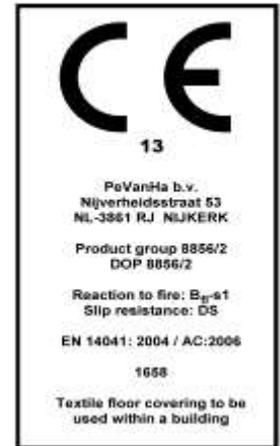

## PERFORMANCE

Use classification	method en 1307	: 33
Castor chair test	EN 985	: A, continuous use
Abrasion	ISO 12951	: pass
Vettermann test	ISO 10361/EN 1471	: pass
Thermal isolation	ISO 8302	: 0.08 m <sup>2</sup> K/W
Dimensional stability	EN 986	: pass
Luxury/Comfort	EN 1307	: classe 1
Static loading		: anti-static




## FLAME PROPERTIES

Reaction to fire	EN ISO 11925-2	
	EN ISO 9239-1	: B <sub>fl</sub> -s1
Hot metal nut test	BS 4790	: Low-radius



## COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	: >5.00
Rubbing, dry	ISO 105 X12	: 5.00
Rubbing, wet	ISO 105 X12	: 5.00



## GENERAL

Recommended maintenance:	Best results are obtained when cleaned with a dry shampoo method.
Pile direction:	Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard.
Laying instructions:	Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m <sup>2</sup> it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

## COLOURS

9677
9655
9675
9665
9676

9678
9685
9675
9625
9672

9673
9633
9675
9622
9671





Požeška 67A, 11030 Beograd  
+381 11 23 49 183  
office@informa.rs  
www.informa.rs