



Skyper *COLLECTION*

Tekstilne Ploče

Skyper *COLLECTION*

Skyper kolekcija je idealna poliamidna tekstilna ploča za poslovne prostore, hotele i konferencijekse dvorane. Izuzetno zahvalna za održavanje. Ova kolekcija odražava energiju i mir prirode. One se ističu u intezitetu i raznolikosti prirodnih boja, koje u celini daju sirov i prirodan izgled Vašim prostorijama. Unesite mir prirodnih stenovitih formi u svoj prostor pomiću kolekcije tekstilnih ploča Skyper. Ove tekstilne ploče kombinuju savremeni dizajn sa organskim izgledom i pogodne su za veoma intezivnu upotrebu, kako u domovima tako i u kancelarijama. Skyper ne nudi samo vizuelnu privlačnost, već i osećaj harmonije. Paleta boja, u rasponu od mekih prirodnih tonova i suptilnih kontrasta, stvara dubinu i dinamiku na svakoj tekstilnoj ploči, čineći Vaš pod vizuelnim remek-delom. Sa blagim prelazima boja, Skyper stvara harmoničnu atmosferu u svakoj prosotriji.

Raznovrsna paleta boja savršeno se uklapa u različite stilove enterijera, od modernih predvorja do udobnih uglova za čitanje. Unesite mir i prirodnu lepotu Skyper tekstilnih ploča u svoj prostor, dok uživate u izdržljivosti koja je pogodna čak i za područja najintezivnije upotrebe. Prihvatite bezvremensku eleganciju koju Skyper može da ponudi.



















Skyper

kolekcija tekstilnih ploč



D 6488



D 6455




D 6444



D 6788



D 6722

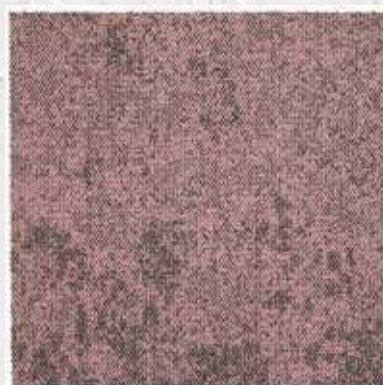

D 6683



D 6663



D 6655



D 6653



D 6577



D 6576



D 6675

Skyper

kolekcija tekstilnih ploč



D 6574



D 6558



D 6549



D 6547



D 6546



D 6545



D 6544



D 6633



D 6578


SPECIFICATION

Quality		: SKYPER
Construction		: Scroll loop pile
Dye method		: Solution dyed
Gauge		: Tufted 1/10"
No. of tufts	ISO 1763	: $\pm 208820/\text{m}^2$
Pile fibre		: 100% Nylon (PA 6)
Pile weight	ISO 8543	: $550 \text{ gr}/\text{m}^2 \pm 5\%$
Pile height	ISO 1766	: $3.0 \text{ mm} \pm 5\%$
Primary backing		: Non-Woven
Tile backing		: Polyflex
Total thickness	ISO 1765	: $5.8 \text{ mm} \pm 5\%$
Total weight	ISO 8543	: $4100 \text{ gr}/\text{m}^2 \pm 7.5\%$
Tile size		: $50 \times 50 \text{ cm} (\pm 19.7'' \times 19.7'')$
Tiles per box		: 20



PERFORMANCE

Use classification	method en 1307	: 33
Castor chair test	EN 985 / EN ISO 4918	: A - intensive use
Abrasion	EN ISO 12951	: pass
Vettermann test	ISO 10361: 2015 /	
	EN ISO 10833: 2019	: pass
Thermal resistance	EN 12664	: $R_{10} = 0.0666 \text{ m}^2 \text{K}/\text{W}$
Thermal resistance	EN 12664	: $R_{23} = 0.0638 \text{ m}^2 \text{K}/\text{W}$
Dimensional stability	EN 986	: pass
Luxury Comfort	EN 1307	: LC1
Anti-slip property	EN 16165 method B	: R13
Impact sound insulation	EN ISO 10140	: $\Delta L_w = 23 \text{ Db}$
Sound Absorption	EN ISO 354	: $\alpha_w = 0.15 \text{ (H)}$

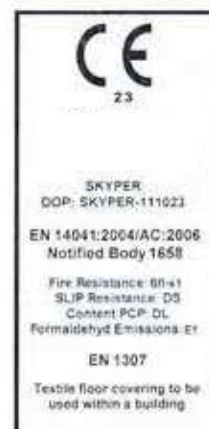

ELECTROSTATIC PROPERTIES

Walk on test	ISO 6356	: -0.5 kV
Horizontal electrical resistance	ISO 10965	: $4.2 \times 10^{12} \Omega$
Vertical electrical resistance	ISO 10965	: $3.3 \times 10^{11} \Omega$
Static loading		: anti-static

FLAME PROPERTIES

Reaction to fire	EN ISO 11925-2	
	EN ISO 9239-1	: Bfl-s1

COLOUR FASTNESS PROPERTIES

Light	EN ISO 105 B02	: 8
Rubbing, dry	EN ISO 105 X12	: 5
Rubbing, wet	ISO 105 X12	: 5
Water, change in colour	EN ISO 105-E01	: 4-5



GENERAL


Recommended maintenance
Pile direction

Best results are obtained when cleaned with a dry shampoo method.
Directional arrows are printed on the back of each tile.
Best results are obtained when laid quarter turn or brick.

Laying instructions:

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m^2 it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

COLOURS







Požeška 67A, 11030 Beograd
+381 11 23 49 183
office@informa.rs
www.informa.rs