



# **Sparta** **COLLECTION**

---

***Tekstilne Ploče***

# Sparta

## *COLLECTION*

Idealna za zahtevne komercijalne prostore, ova modularna itison ploča dodaje eleganciju kancelarijama, prodajnim objektama, koridorima i kućnim prostorima. Napravljena od izdržljivog 100% poliamidnog SDN najlona sa bukle strukturom. Ove tekstilne ploče mogu izdržati intezivnu upotrebu uključujući i kancelarijske stolice.

Najviše su upotrebne klase 33. i zadržavaju postojanost boja uz besprekorni prelaz između boja.

Održavaju se jednostavno, kompatibilne su sa podnim grejanjem i ispunjavaju stroge standarde protivpožarne bezbednosti(Bfl-S1).







# Sparta

*kolekcija tekstilnih ploča*



D 2772



D 2776



D 2777



D 2778



D 2783



D 2784




D 2793



D 27278

## SPECIFICATION

Quality		: <b>Sparta</b>
Construction		: Tufted loop pile
Gauge		: Tufted 1/10"
No. of tufts	ISO 1763	: $\pm 173360/\text{m}^2$
Pile fibre		: 100% PA SDN
Pile weight	ISO 8543	: $510 \text{ gr}/\text{m}^2 \pm 5\%$
Pile height	ISO 1766	: $3,50 \text{ mm} \pm 5\%$
Primary Backing		: PA/PES non-woven - Colback
Tile backing		: Polyflex
Total thickness	ISO 1765	: $5,20 \text{ mm} \pm 5\%$
Total weight	ISO 8543	: $3800 \text{ gr}/\text{m}^2 \pm 7,5\%$
Tile size		: $50 \times 50 \text{ cm} (\pm 19.7'' \times 19.7'')$
Tiles per box		: 20

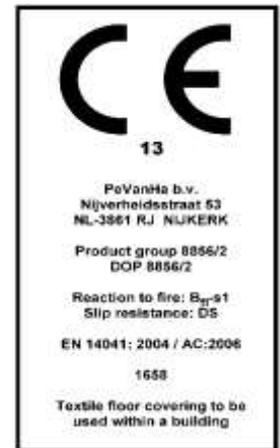

## PERFORMANCE

Use classification	method en 1307	: 33
Castor chair test	EN 985	: A, continuous use
Thermal isolation	ISO 8302	: ca. $0,07 \text{ m}^2 \text{ K}/\text{W}$
Luxery/Comfort	EN 1307	: LC1
Sound Insulation	ISO 10140	: 24 dB

## ELECTROSTATIC PROPERTIES

Walk on test	ISO 6356	: 0,1kV
Horizontal electrical resistance	ISO CD 10965	: $3 \times 10^8 \Omega$
Vertical electrical resistance	ISO CD 10965	: $4 \times 10^{10} \Omega$
Static loading		: anti-static



## FLAME PROPERTIES

Reaction to fire	EN 13501-1	: B <sub>fl</sub> -s1
------------------	------------	-----------------------

## COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	: $\geq 5,00$
Rubbing, dry	ISO 105 X12	: 5,00
Rubbing, wet	ISO 105 X12	: 5,00
Shampoo	BS 1006	: 5,00
Water	ISO 105 E01	: 4,50
Water stains	TNO W 6024	: 5,00

## GENERAL

Recommended maintenance:	Best results are obtained when cleaned with a dry shampoo method.
Pile direction:	Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard.
Laying instructions:	Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than $30 \text{ m}^2$ it is advisable to use double sided adhesive tape on every 8th row or a tackifier.





Požeška 67A, 11030 Beograd  
+381 11 23 49 183  
office@informa.rs  
www.informa.rs