

# Vienna

## TECHNICAL SPECIFICATION

Manufacturing method	: Level loop
Pile type	: Loop pile
Pile fibre	: 100% polypropylene solution-dyed
Gauge	: 1/10"
Pile weight	: 400 gr/m <sup>2</sup>
Pile height	: 2.9 mm
Total weight	: 3700 gr/m <sup>2</sup>
Total thickness	: 5.9 mm
Tuft density	: 193.550/m <sup>2</sup>
Tile size	: 50 x 50 cm
Backing	: Polyflex
Tiles per box	: 20

## PERFORMANCE

Use classification		: 31
Caster chair test	EN 985	: B, occasional use
Abrasion	EN 1963	: Pass
Vettermann test	EN 1471	: Pass
Dimensional stability	EN 986	: Pass
Thermal isolation	ISO 8302	: 0.10 m <sup>2</sup> K/W
Sound absorption	ISO 140-8	: 25 dB
Luxery class		: LC1
DOP-nr		: 1016-3612
Prodis-nr		: CDD4AC29

## ELECTROSTATIC

Static loading	: Anti-static
----------------	---------------

## FLAMMABILITY



Reaction to fire	EN ISO 9239-1	: Cfl-s1
Reaction to fire	BS 4790	: Low radius of effect of ignition

## COLOUR FASTNESS

Light	ISO 105 B02	: 7.0 - 8.0
Rubbing	ISO 105 x12	: 5.0

## MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.

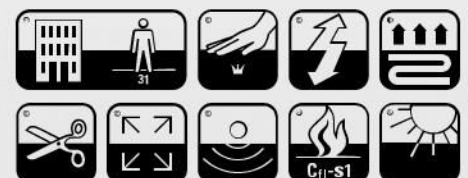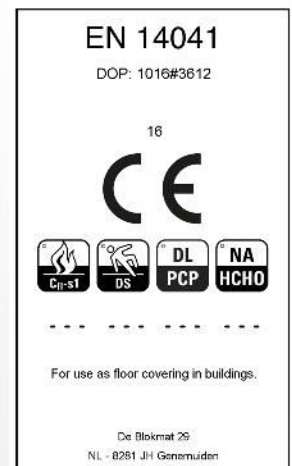



7297




7078

7293



7242

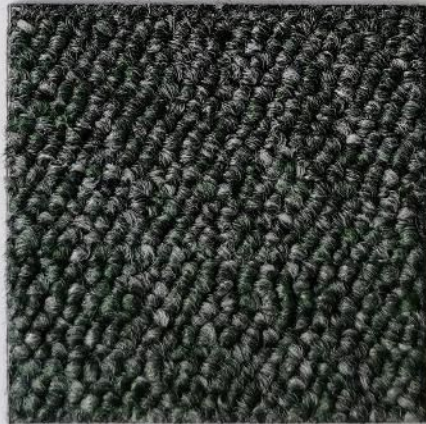


7215




7270





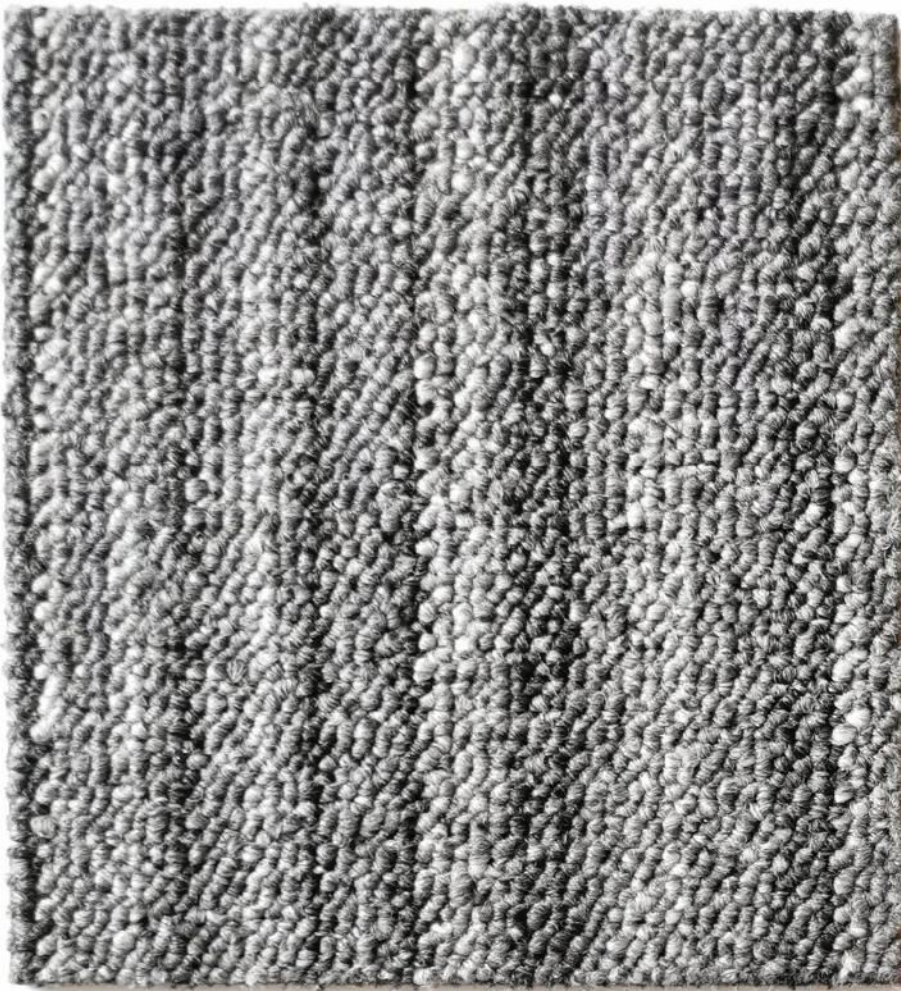


7872

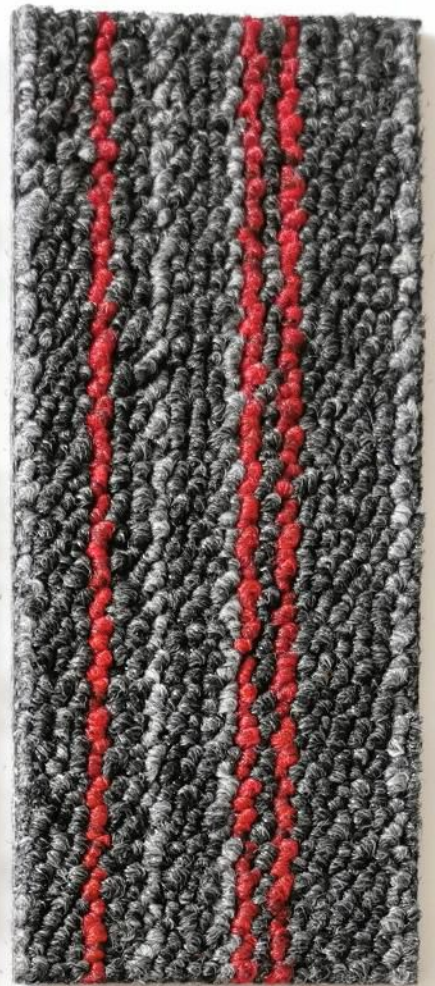


7785

7782

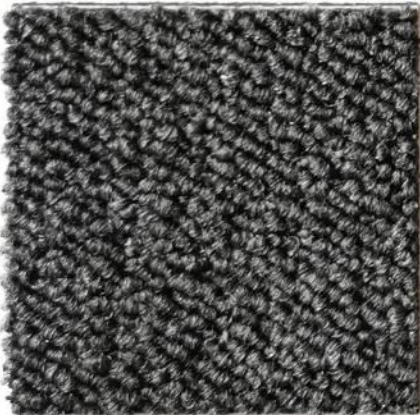

7279

7278

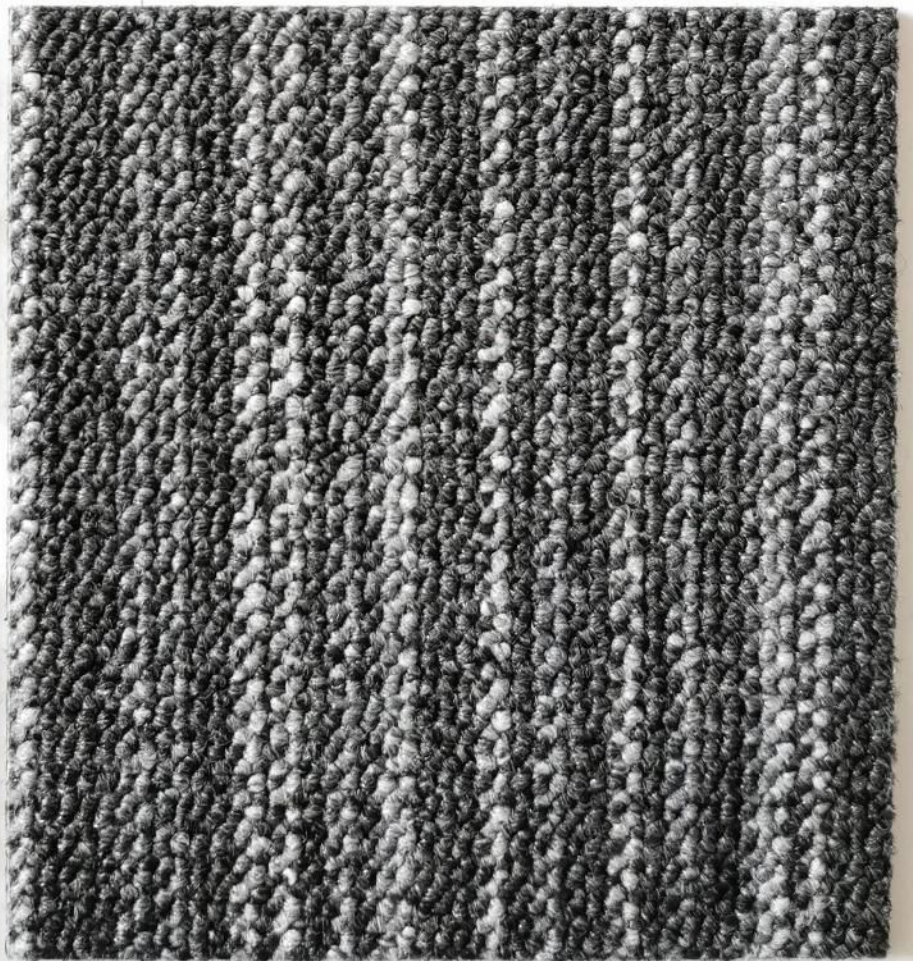





7285



7284

8458



7277

7272

